



RL-MINILAH

Specs

- 125dB sound output
- 12vdc/120VAc
- Tomar Strobe with Custom Colors
- 2.4ghz Radio
- Customizable private label

The Mini LAH is exceptionally loud and amazingly small. The Mini alarm is the more compact option rather than the full size LAH, and also the Mini LAH has a higher pitch. Works in sync with all of the Redline monitors with programmable addressing.

ATTABOX

6x6x4 Opaque Enclosure


NEMA RATED:

IP68
Type 6P, 4X, 4, 3R, 12
F1 UV-light
5VA Flammability
UL 1741 Compliant

TOMAR MICROSTROBES


- built-in RFI filters • lens has hermetic o-ring seal
- solid state power supply
- 10,000 hour strobe lamp
- available in six lens colors
- UL listed
- NEMA 4X



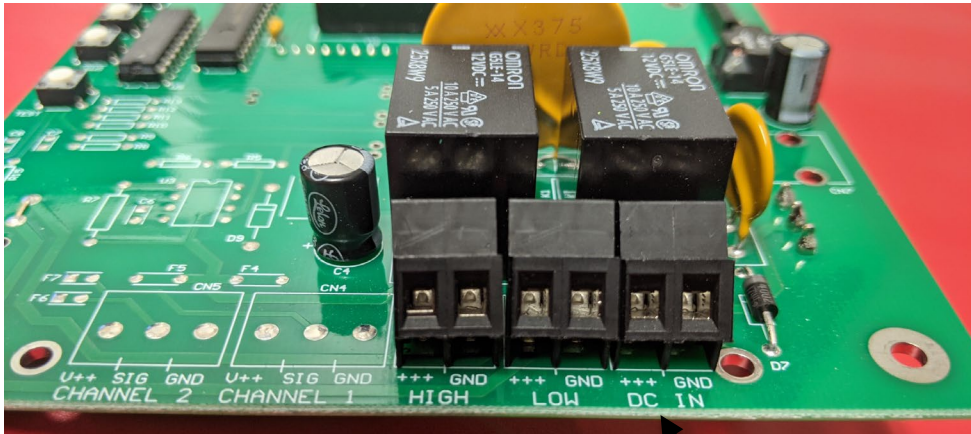

12vdc IN

High and low relays will trigger when they pass the set point thresholds on your RL- Monitor. *These set points are controlled on the Redline 2, 4, 8, 16, 24 channel monitors. *

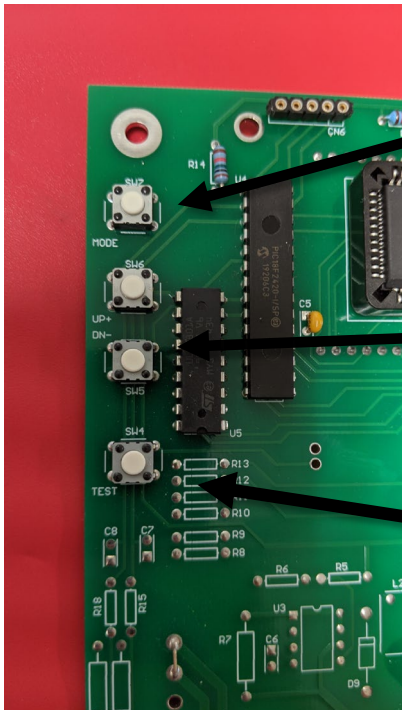


Mode button- press mode button to change menu settings

Up and Down buttons- use to change digits in the menus

Test button- scrolls through the sources

you shouldn't need this button

Addressing- To get to this mode press the **MODE** button twice.

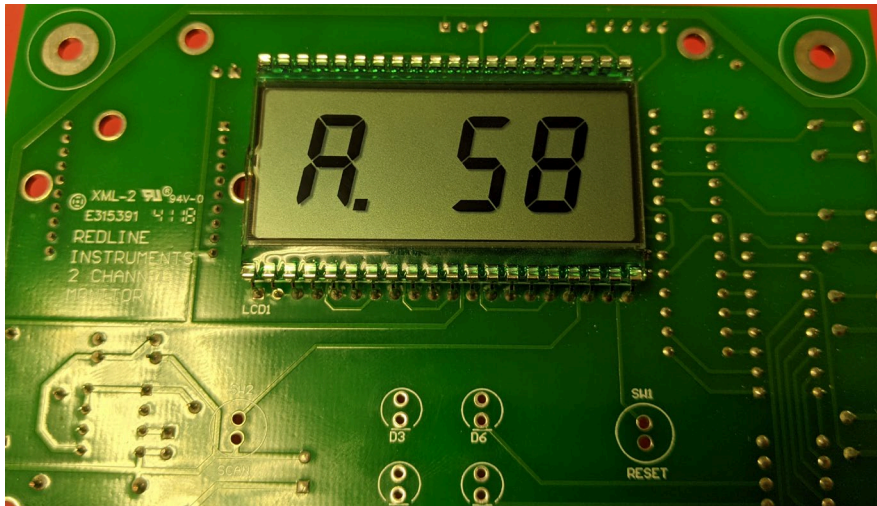

---The default address is always set to 58. Change this by using the **Up and Down** buttons. This address has to match the RL- Monitor or it will not communicate. Refer to your monitors manual on how to set its destination address. Address 60 does not allow any communication, therefore, do not use this channel number.

****Double check your monitor's address if relays do not trigger. ****

Source addresses- to get to this set of address press the **MODE** button 3 times

Consult your Redline Technician before changing these set of addresses

---Source addresses offer another layer to addressing. Default they are all set to 46. This address has to match the RL- Monitor or it will not communicate. Refer to your monitors manual on how to set its source address.